




The coilex solution

Stainless Steel Indirect Water Heaters

Select coilex stainless indirect water heaters for maximum heating performance

Available in 7 different models

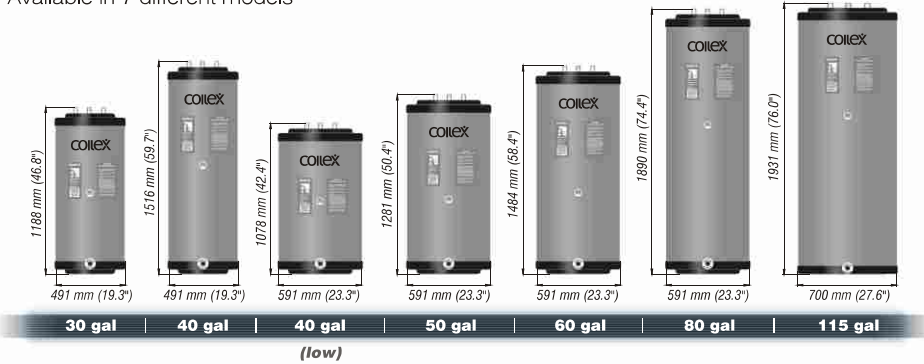


The high quality of the design and fabrication of our complete stainless steel heaters ensure efficient, maintenance-free operation and continuous supply of hot water. Turn to us for an economical and effective solution for all of your indirect water heater requirements.

These rugged units are designed for heating large volumes of domestic or process water for residential, commercial or industrial applications.

Characteristics	CX-30	CX-40	CX-40 (low)	CX-50	CX-60	CX-80	CX-115
Pump Capacity (gpm)	5	5	5	8	10	13	17
Loss in Feet	1.4	1.4	1.4	2.5	3.5	5.9	13
Capacity (gal)	30	40	40	50	60	80	115
Boiler Output (MBH)	75	85	85	100	125	175	225
Output (gal)							
First Hour	112	145	145	170	212	285	390
Continuous	91	115	115	135	167	233	300
Connections (inch)							
Domestic - MPT	3/4"	3/4"	3/4"	3/4"	3/4"	1"	1 1/2"
Boiler - MPT	1"	1"	1"	1"	1"	1"	1"
Recirculation	-	-	-	-	-	3/4"	3/4"
Dimensions (inch)							
Diameter	19.3	19.3	23.3	23.3	23.3	23.3	27.6
Height	46.6	59.7	42.4	50.4	58.4	74.4	76
Shipping Weight (lbs)	65	80	80	95	110	140	180

Based on 90° rise with incoming water at 50°F and boiler temperature at 180°F.

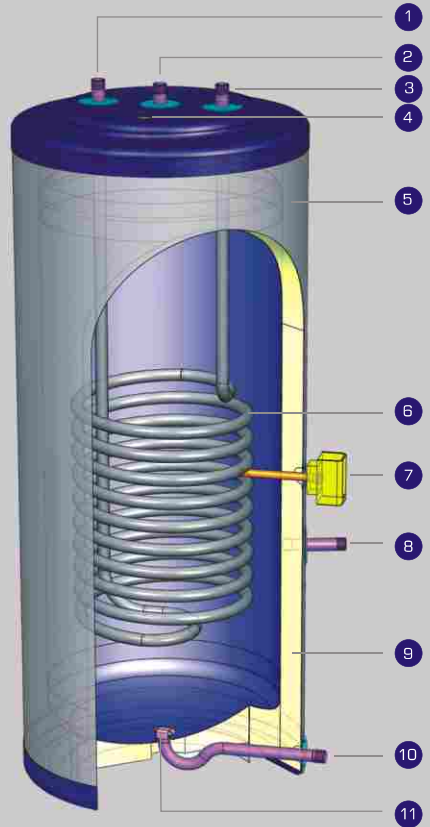

- 1 boiler water out
- 2 hot water outlet
- 3 boiler water in
- 4 temperature and pressure valve
- 5 polypropylene jacket
- 6 heating coil
- 7 aquastat control
- 8 recirculation
- 9 insulation
- 10 cold water inlet and drain
- 11 cold water diffuser



Our stainless steel indirect water heaters are ideal for use with any hydronic, radiant heat, and steam heating systems.

Uses Include:

- whirlpools, hot tubs, swimming pools
- radiant floor heating
- households with multiple bathrooms and appliances
- commercial and industrial institutions (hotels, apartments, schools, hospitals)

**FOR INQUIRIES OR CUSTOMER SERVICE:
CALL 1-888-738-1350**

Available Features with Coilex Indirect Water Heaters:

- Complete passivated 316L stainless steel constructions ensure reliability and durability of products
- Engineered single-coil, dual-coil, or custom-coil designs to increase heat transfer rates and equalize thermal distribution within the tanks
- Connections accessible from the side of the tank or through the top of the tank for ease of installation and use
- Units are fully drainable and flushable with the drain located in the bottom center
- Quick recovery rate for cost-effective operation
- Standard indirect water heaters available complete with aquastat
- Standard flame-retardant foam insulation to minimize heat loss and to protect the operator
- Compact, lightweight designs
- Easy to install, operate, and maintain